

April 12, 2012

ADDENDUM #2

NORTH KANE COUNTY EVENTS CENTER

Regarding the bid form and other documents that have been issued for the bidding of the interior construction elements for the new North Kane County Events Center, the following is a list of revisions and clarifications:

1. The following interior doors shall be egress doors and shall be fitted with panic hardware per the specification issued under addendum #1: Doors 106, 109, 110, 114, 117, 121, and 122 (Refer to the plans and door schedule for location of the above referenced doors).
2. The following interior doors shall be lockable doors and shall be fitted with Cal-Royal Genesys Series accessible lockable levers: Doors 107, 108, 111, 112, 113, 118, 119, 120, 201, and 202 (Refer to the plans and door schedules for locations of the above referenced doors). All doors shall be keyed the same.
3. Notes 2 and 5 found on the door hardware specification issued with addendum #1 shall be disregarded. Notes 1 and 4 of this same specification shall be revised to "Cal-royal Genesys Series accessible lockable levers or equal". Sheets 2 & 3 of this addendum are additional specifications on these levers.
4. It has been brought to our attention that a typo occurs on the "Electrical Legend" located on sheets E1.0 and E2.0 for the 3rd item listed from the top of the legend. It states "1700 W MH WALL PAC WITH LIGHT SHIELD AND EMERGENCY POWER PACK BACK-UP @ 84"". This shall be revised to say "170 W MH WALL PAC WITH LIGHT SHIELD AND EMERGENCY POWER PACK BACK-UP @ 84"".
5. Drawing sheet M1.0 has been updated with a Keyed Note for HP-1 which shall be CARRIER MODEL 25VNA060A003 HEAT PUMP CONDENSOR.

GRADE 1

Cylindrical Leverset

GENESYS SERIES


 Meets ADA requirements.
Specially designed for
Barrier Free Application
Conforms with ANSI A156.2
Series 4000, Grade-1.
Meets A117.1 Accessibility Code.

 LISTED 3 HOURS,
UL10C, UBC 7-2-1997


Extra Heavy Duty Cylindrical Lever Sets (Clutch Style)

- Available With Interchangeable core for Best, Falcon, Arrow
- Available With Interchangeable Core for Schlage Full Size Format OEM Cylinders


**(PATENTED)
CLUTCH
FREEWHEELING**




GN DESIGN



SPA DESIGN



AT DESIGN



TUB DESIGN

CLUTCH

Free turning handle in the locked position, without retracting the latch, to deter breaking of the handle

GENERAL SPECIFICATIONS:

Featuring CLUTCH System, free turning handle to deter breaking of the handle.
Full length 4-3/4" lever handle with 3/8" return on GN and SPA Design. Rose diameter 3-1/2". Key removable outside lever for fast rekeying. Non-handed levers. Concealed mounting screws.

- ANSI STANDARDS:

Meets or exceeds of BHMA/ANSI A 156.2 Series 4000, grade 1 requirements.

- CYLINDERS & KEYWAYS:

6 pin solid brass "C" keyway standard.
Schlage C-K, Russwin D1, L4, Corbin 60, Sargent LA Falcon/Weiser E, Arrow, Yale GA, Kwikset. Can also accept Medeco, Assa, and Kaba High Security Cylinders.

- INTERCHANGEABLE CORE:

- Interchangeable core locks will accept compatible 6 or 7 pin cores with BEST, FALCON and ARROW. Add "IC" before part #.
- Interchangeable core locks will accept schlage full size format OEM cylinder. For SCHLAGE format, replace ICCGN with ICGYS.

- HOUSING:

Cold rolled steel and zinc dichromate finish for rust resistance with precision cast steel retractor.
2-1/8" diameter bore.

- TRIM:

Thru-bolted assembly through door with separate spring cage for each lever. Matching design to SL Series Grade II levers.

- FINISHES:

626: (US26D) - Satin chrome
613: (US10B) - Oil rubbed bronze
625: (US26) - Polished chrome
605: (US3) - Polished brass
612: (US10) - Satin bronze
606: (US4) - Satin brass
Finishes not shown are available subject to lead time.

- FUNCTIONS:

- CGN-00: Entrance / Office lock
 - CGN-101: Dormitory
 - GN-02: Store lock
 - CGN-03: Classroom
 - GN-04: Communicating
 - CGN-05: Storeroom
 - GN-09: Institution
 - CGN-88: Patio
 - CGN-20: Privacy
 - GN-30: Passage
 - GN-40: Dummy
- ** Other functions available upon request.

- Indicates function available with interchangeable core.

CAL-ROYAL PRODUCTS, INC.

6605 FLOTILLA ST., COMMERCE, CA 90040 U.S.A.
TEL: (323) 888-6601 FAX: (323) 888-6699
Website: cal-royal.com • Email: sales@cal-royal.com




- HOW TO ORDER:

When ordering "AT" & "SPA" designs, replace design name Example: CGN-00 entrance in "AT" design is CAT-00.

- LATCH OPTIONS:

"UL" listed for 3 hour fire labeled doors.
2-3/4" backset standard, brass with 1/2" throw.
2-3/8" backset optional.
GND-750 deadlatch reversible for flat and beveled door.
3/4" throw anti-friction deadlatch for pair of fire doors



- DOOR RANGE:

1-3/8" to 1-3/4" thickness.
2" to 2-1/4" thickness also available on request.

- STRIKES:

ASA 1-1/4" x 4-7/8" standard.
Other strikes available upon request.


- ELECTRIFIED LOCKS:

Available upon request.

- TACTILE & LEAD LINING:

Available upon request.

Door Preparation

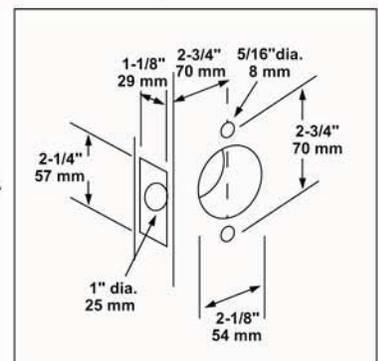

Distributed by:

